


Design By Ramos & Bassols

The Spa wall or ceiling lamp is suitable for damp areas. Its versatile system enables the luminaries to be placed in a line to illuminate four metres and a half of wall or ceiling space.

## Model Sheet



### Finish

25 Beige D1  
NCS S 4005-Y50R

11 Black  
NCS S 8500-N

23 Warm White  
NCS S 0502-Y50R

### LED

2700 K / 3500 K

### Dimming

Casambi / DALI / 1-10V

### Installation type

Surface Canopy / Remote basic




### LED

CRI>90 5120 lm 119  
2700 K / 3500 K

### Driver

Constant Current 1200 220-240 V V  
50-60 Hz HZ



### Application

Ceiling Lamps

### Packaging

1 Box  
2.3 m x 0.1 m x 0.1 m  
Gross weight 4.2  
Net weight 2.6  
Vol. 0.023



### Lighting effect

#### Linear

Linear lighting applications for functional and graphic illumination



### Photometric Data

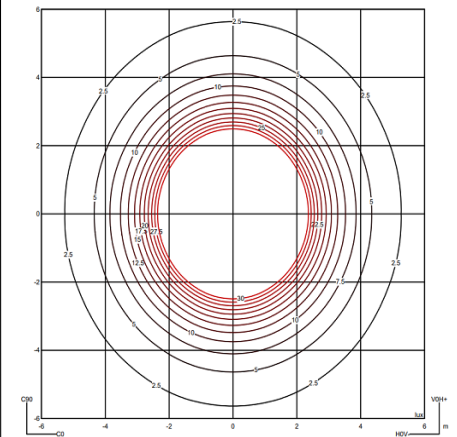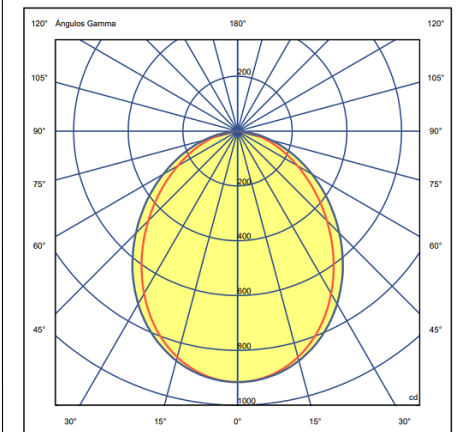

Efficiency 60.77 lm/W  
Coordinate System CG  
Total Flux 2143.97 lm  
Maximum Value 915.55 cd

Min. quantity, upcharge and extra lead time apply

All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)