
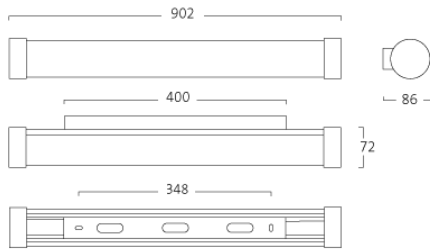


Art.no. 17131-402

EAN 7320048037312



Installation Horizontal or vertical on a wall or ceiling.

Connection Snap-in terminal block 5x1,5mm². 1-phase through-wiring possible. Surface mounted mains cable possible.

Design White body of extruded aluminium (RAL9016). White wall bracket in aluminium zinc-plated sheet (RAL9016). Ends in matt white plastic, attached by means of a magnet.

Louvre Opal acrylic diffuser (PMMA).

Dimming DALI as standard.

Accessories Assembly fittings and supplementary components, see Accessories.

Telescope Aqua LED

Round beam, DALI/Phase-pulse

DESIGN

Light distribution Round beam **Louvre** Opal
Colour White

LIGHT DATA & PERFORMANCE

Lumen output 1253 **lm/W** 131
CCT, K 3000 **CRI** 80
SDCM 3 **Melanopic DER** 0.450
Lumen maintenance 50 000 h L91 **Lumen maintenance 75 000 h** L86
Lumen maintenance 100 000 h L82 **Lumen maintenance L80 B50, h** 100000
Lumen maintenance L90 B50, h 55000 **LED driver, h/max failure %** 100000/10
Energy class, LED module C

CONTROLS & CONNECTIVITY

Light control DALI/Phase-pulse **Driver brand** Osram
Power on last level Yes **Switch control, max no.** 20
AM Yes **ZD4i Certified** False
Daylight functionality False

ELECTRICITY & ENCLOSURE

Rated supply voltage, V 220-240 **Mains frequency, Hz** 0, 50, 60
Protective class 1 **IP rating** 44
IK rating 03 **System Wattage** 10
Stand by W 0.15 **Min. ambient temperature, °C** -25
Max. ambient temperature, °C 25 **MCB B10A, pcs** 80
MCB B16A 130 **MCB C10A** 133
MCB C16A 221 **THD, %** 13
Surge protection CM, kV/kA 2 **Surge protection DM, kV/kA** 1
Power factor, 100 % 0.98

DIMENSIONS

Length, mm 902 **Width, mm** 72
Height, mm 86 **Weight, kg** 1.3