
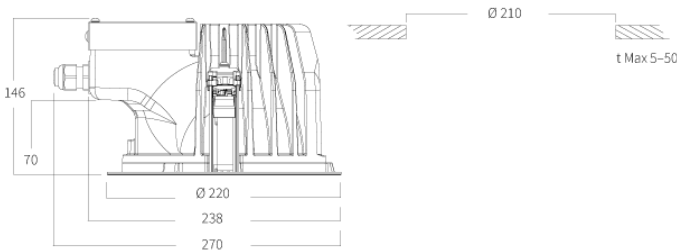


## Art.no. 308004

EAN 7320047558283



**Efficient, robust downlight suitable for various application areas with several luminous fluxes and distribution angles.**

**Installation** Luminaire for recessed ceiling installation, for ceiling thickness 5–50 mm. Stable assembly springs included. Hole pattern dimension: Ø 210 mm.

**Connection** Terminal block 3x2.5 mm<sup>2</sup> or 5x2.5 mm<sup>2</sup> when dimming. Integrated driver for flexible installation. Onward connection possible.

**Design** Luminaire body and reflector ring of cast aluminium. Glass of PMMA.

**Reflector** Reflector of matt anodized aluminium, lens of clear acrylic.

**Light distribution** Wide and medium-beam.

**Standard colour** Anthracite grey (Gris 900 Sablé).

**Miscellaneous** CLO (Constant Light Output) ensures the luminaire provides the same amount of light for the duration of its rated-life.

## Rondo G3 recessed

Wide Beam, Recessed, Matt

### DESIGN

**Installation** Recessed

**Light distribution** Wide Beam

**Reflector** Matt

**Colour** Anthracite grey

### LIGHT DATA & PERFORMANCE

**Lumen output** 2439

**CLO function active** Yes

**CLO time, h** 100000

**lm/W** 123

**CCT, K** 4000

**CRI** 80

**SDCM** 3

**Melanopic DER** 0.620

**Lumen maintenance 100 000 h L100**

**Lumen maintenance L100 B50, h** 100000

**LED driver, h/max failure %** 100000/10

**Energy class, LED module** E

### CONTROLS & CONNECTIVITY

**Driver brand** Tridonic

**AM** Yes

**ZD4i Certified** False

**Daylight functionality** False

### ELECTRICITY & ENCLOSURE

**Rated supply voltage, V** 220-240

**Mains frequency, Hz** 0, 50, 60

**Protective class** 1

**IP rating** 66

**IK rating** 10

**Start W** 20

**End W** 22

**Average W** 21

**Stand by W** 0.16

**Min. ambient temperature, °C** -40

**Max. ambient temperature, °C** 40

**MCB B10A, pcs** 19

**MCB B16A** 30

**MCB C10A** 31

**MCB C16A** 50

**THD, %** 7

**Surge protection CM, kV/kA** 8

**Surge protection DM, kV/kA** 6

**Power factor, 100 %** 0.97

### DIMENSIONS

**Height, mm** 147

**Diameter, mm** 220

**Weight, kg** 2.3