


# Hunter RV



1x 2500-4800 lm 17-38 W 500-1050 mA 36 V 830 54° black

Article No.: **13086141302**



## Dimension

## Photometry

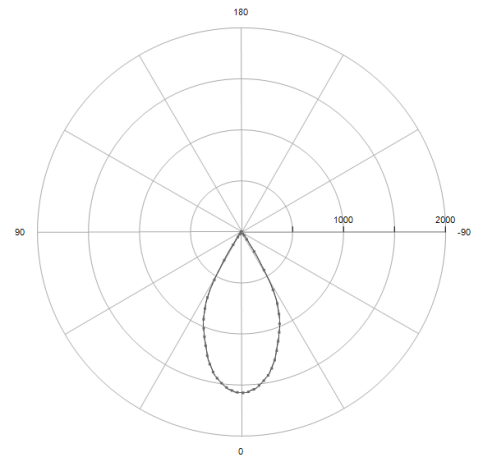

**Dimension (mm):** W: 201 H: 163  
**Cut Out (mm):** Wco: 186 Hco: 172

## Light output level in DC operation

Power (W)	Power Supply (mA)	Luminaire Efficacy (lm/W)	Nominal luminaire luminous flux
16	500	147	2500
24	700	139	3400
32	900	131	4200
37	1050	125	4800

### Light output ratio

LOR 100  
 ULOR 0  
 DLOR 100

### UGR values

X=4H, Y=8H S = 0,25H  
 Radiant class 70/50/20  
 Transverse 16.6  
 Longitudinal 16.6

### Classification

BZ BZ 1  
 UTE --  
 DIN A60  
 CIE 100 100 100 100 100

# Hunter RV

1x 2500-4800 lm 17-38 W 500-1050 mA 36 V 830 54° black

Article No.: **13086141302**

## Product description

**Beam angle:** 54 ° **Led colour:** 3000K, CRI>80 **Colour rendering index - CRI:** 80

**Correlated colour temperature - CCT:** 3000 K

**Chromaticity tolerance (initial MacAdam):** 2 **Lumen maintenance factor:** 50000h

L90 B10 at 25°C **Driver:** Driver not included, order separately **Power:** 38,00 W

**Power Supply Range:** 500 - 1050mA DC **Forward voltage (Vf):** 36.17 V

**IP protection :** IP20 **EAN No.:** 3831116786574 **Colour body:** Black structural

**Optic material:** Metalized polycarbonate optic with a lacquer finish, uniform

distribution **Material:** Steel-sheet housing with aluminium frame **Weight:** 1,50 kg

