

Katona

THORN

96629366 KAT RD 1400-840 HF

LED 12W KATO_MO_84	CB	IP65	IK10	CE	850°C	T _a -15 +35
--------------------	----	------	------	----	-------	---------------------------


Katona

A very slim, round functional LED luminaire. Fixed output LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.


Dimensions: Ø307 x 58 mm
Luminaire input power: 11.7 W
Luminaire luminous flux: 1400 lm
Luminaire efficacy: 120 lm/W
Weight: 0.94 kg



TLG_KATO_F_RD_PDB.jpg

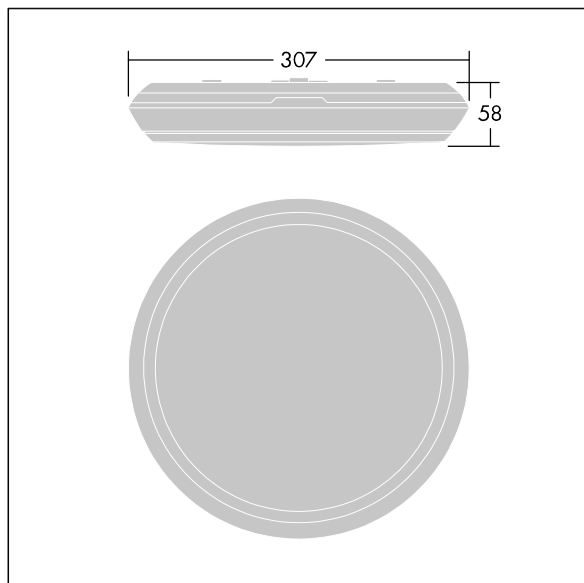

TLG_KATO_M_RD_LDS.wmf

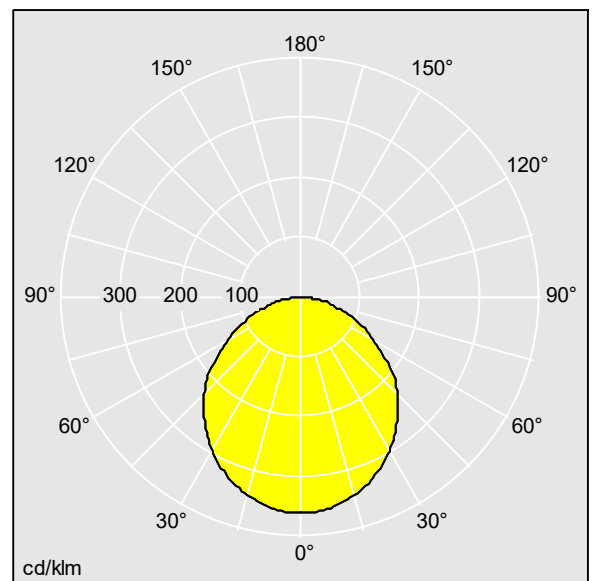

TLG_SP_0043598.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1400 lm
Luminaire efficacy*: 120 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 87501082 LC 17/250-400/42 flexC SC
SNC4
LOR: 1,00 ULOR: 0,03 DLOR: 0,97

Correlated colour temperature*: 4000 Kelvin
Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000 h at 35 °C
Luminaire input power*: 11.7 W Power factor = 0.91
Dimming: FIX
Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting