




## w182 Pastille c2

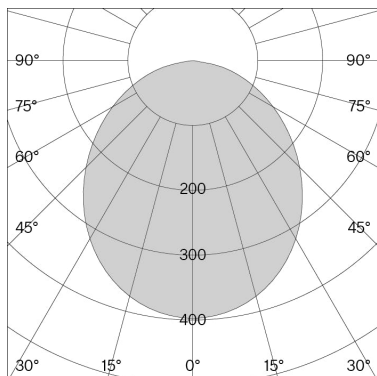

## w182 Pastille c2

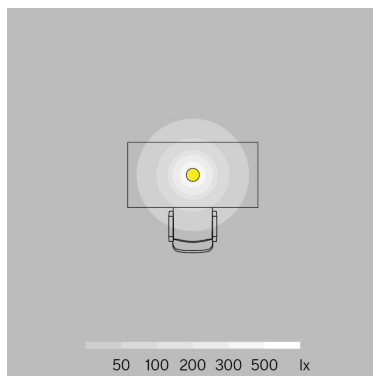

## w182 Pastille b2

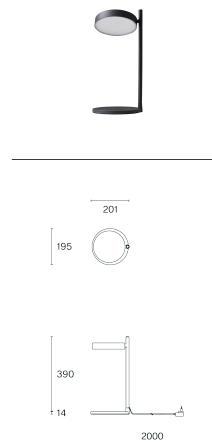

## Technical information

### Physical

<b>Material</b>	Lamp body: biopolyamide Table base/clamp: biopolyamide & steel Pin/bracket: biopolyamide Floor stand: steel
-----------------	---

<b>Optics</b>	Reflector: ABS Diffuser: polycarbonate
---------------	--

<b>IP rating</b>	20
------------------	----

<b>Protection class</b>	II
-------------------------	----

### LED

<b>Light source</b>	COB LED (included)
---------------------	--------------------

<b>Life time expectancy</b>	L80 / 50,000 h
-----------------------------	----------------

<b>CRI Colour Rendering Index</b>	96
-----------------------------------	----

<b>Standard deviation of colour matching</b>	3-step MacAdam
--	----------------





Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

## Article-specific information

<b>Version</b>	b2
<b>Mounting</b>	Base
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 457 lm
<b>Voltage / System power</b>	100–240 V / 7.3 W
<b>Efficacy</b>	63 lm / W
<b>Light control</b>	Dimmable
<b>Net weight</b>	1.8 kg
<b>Packaging dimensions</b>	L51.7 × W22.5 × H6.4 cm (0.007 m³)
<b>Gross weight</b>	3.3 kg

### Colour

<b>Soft white (NCS 1002Y50R)</b>		<b>182B20250</b> / 7330492008103
<b>Graphite black (RAL 9011)</b>		<b>182B29011</b> / 7330492008110
<b>Olive green (RAL 6003)</b>		<b>182B26003</b> / 7330492008097
<b>Oxide red (RAL 3009)</b>		<b>182B23009</b> / 7330492008080

### Accessories

Adapter suitable for Vitra AdHoc

Adapter suitable for Vitra Tyde

### b2

<b>Base</b>	2700 K / 457 lm
	100–240 V / 7.3 W
	63 lm / W
	Dimmable


	1.8 kg
	L51.7 × W22.5 × H6.4 cm (0.007 m³)
	3.3 kg

### Art. No. / EAN code


<b>182B20250</b> / 7330492008103
<b>182B29011</b> / 7330492008110
<b>182B26003</b> / 7330492008097
<b>182B23009</b> / 7330492008080

### Art. No. / EAN code



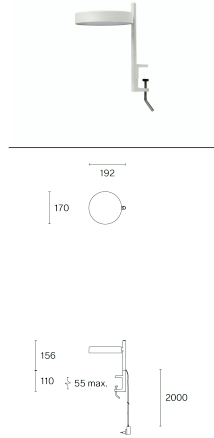

## w182 Pastille c1

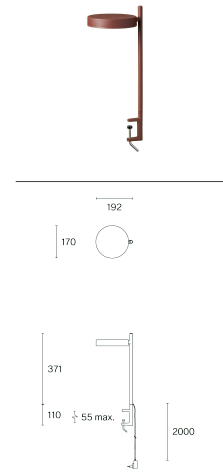


## w182 Pastille c2




## Article-specific information

<b>Version</b>	c1	c2
<b>Mounting</b>	Clamp	Clamp
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 457 lm	2700 K / 457 lm
<b>Voltage / System power</b>	100–240 V / 7.3 W	100–240 V / 7.3 W
<b>Efficacy</b>	63 lm / W	63 lm / W
<b>Light control</b>	Dimmable	Dimmable
<b>Net weight</b>	0.8 kg	0.8 kg
<b>Packaging dimensions</b>	L51.7 × W22.5 × H6.4 cm (0.007 m <sup>3</sup> )	L51.7 × W22.5 × H6.4 cm (0.007 m <sup>3</sup> )
<b>Gross weight</b>	2.3 kg	2.3 kg
<b>Colour</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Soft white (NCS 1002Y50R) 	<b>182C10250</b> / 7330492008226	<b>182C20250</b> / 7330492008264
Graphite black (RAL 9011) 	<b>182C19011</b> / 7330492008233	<b>182C29011</b> / 7330492008271
Olive green (RAL 6003) 	<b>182C16003</b> / 7330492008219	<b>182C26003</b> / 7330492008257
Oxide red (RAL 3009) 	<b>182C13009</b> / 7330492008202	<b>182C23009</b> / 7330492008240
<b>Accessories</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Adapter suitable for Vitra AdHoc		
Adapter suitable for Vitra Tyde		

## w182 Pastille p2

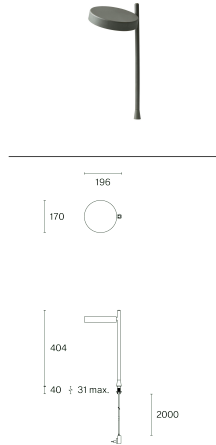


## w182 Pastille f2

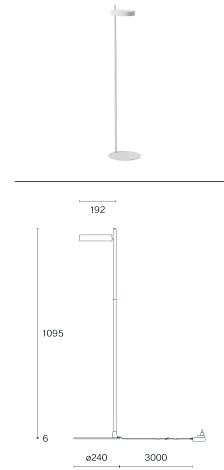


## Article-specific information

<b>Version</b>	p2	f2
<b>Mounting</b>	Pin – Integrated (hole ø 20 mm)	Floor base
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 457 lm	2700 K / 457 lm
<b>Voltage / System power</b>	100–240 V / 7.3 W	100–240 V / 7.3 W
<b>Efficacy</b>	63 lm / W	63 lm / W
<b>Light control</b>	Dimmable	Dimmable
<b>Net weight</b>	0.7 kg	3.4 kg
<b>Packaging dimensions</b>	L51.7 × W22.5 × H6.4 cm (0.007 m <sup>3</sup> )	L75.0 × W32.5 × H5.0 cm (0.01 m <sup>3</sup> )
<b>Gross weight</b>	2.2 kg	4.8 kg
<b>Colour</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Soft white (NCS 1002Y50R)	182P20250 / 7330492008387	182F20250 / 7330492008349
Graphite black (RAL 9011)	182P29011 / 7330492008394	182F29011 / 7330492008356
Olive green (RAL 6003)	182P26003 / 7330492008370	182F26003 / 7330492008332
Oxide red (RAL 3009)	182P23009 / 7330492008363	182F23009 / 7330492008325
<b>Accessories</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Adapter suitable for Vitra AdHoc	182-PVI01 / 7330492002460	
Adapter suitable for Vitra Tyde	182-PVI03 / 7330492002477	

## w182 Pastille br1



## w182 Pastille br2



## Article-specific information

<b>Version</b>	br1	br2
<b>Mounting</b>	Wall bracket	Wall bracket
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 457 lm	2700 K / 457 lm
<b>Voltage / System power</b>	100–240 V / 7.3 W	100–240 V / 7.3 W
<b>Efficacy</b>	63 lm / W	63 lm / W
<b>Light control</b>	Dimmable	Dimmable
<b>Net weight</b>	0.8 kg	0.8 kg
<b>Packaging dimensions</b>	L51.7 × W22.5 × H6.4 cm (0.007 m <sup>3</sup> )	L51.7 × W22.5 × H6.4 cm (0.007 m <sup>3</sup> )
<b>Gross weight</b>	2.3 kg	2.3 kg
<b>Colour</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Soft white (NCS 1002Y50R) 	<b>182BR10250</b> / 7330492008141	<b>182BR20250</b> / 7330492008189
Graphite black (RAL 9011) 	<b>182BR19011</b> / 7330492008158	<b>182BR29011</b> / 7330492008196
Olive green (RAL 6003) 	<b>182BR16003</b> / 7330492008134	<b>182BR26003</b> / 7330492008172
Oxide red (RAL 3009) 	<b>182BR13009</b> / 7330492008127	<b>182BR23009</b> / 7330492008165
<b>Accessories</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
Adapter suitable for Vitra AdHoc		
Adapter suitable for Vitra Tyde		